


Recessed Fixed Downlight Kit Cevon CRI97 Slim-Trim Elite



R530

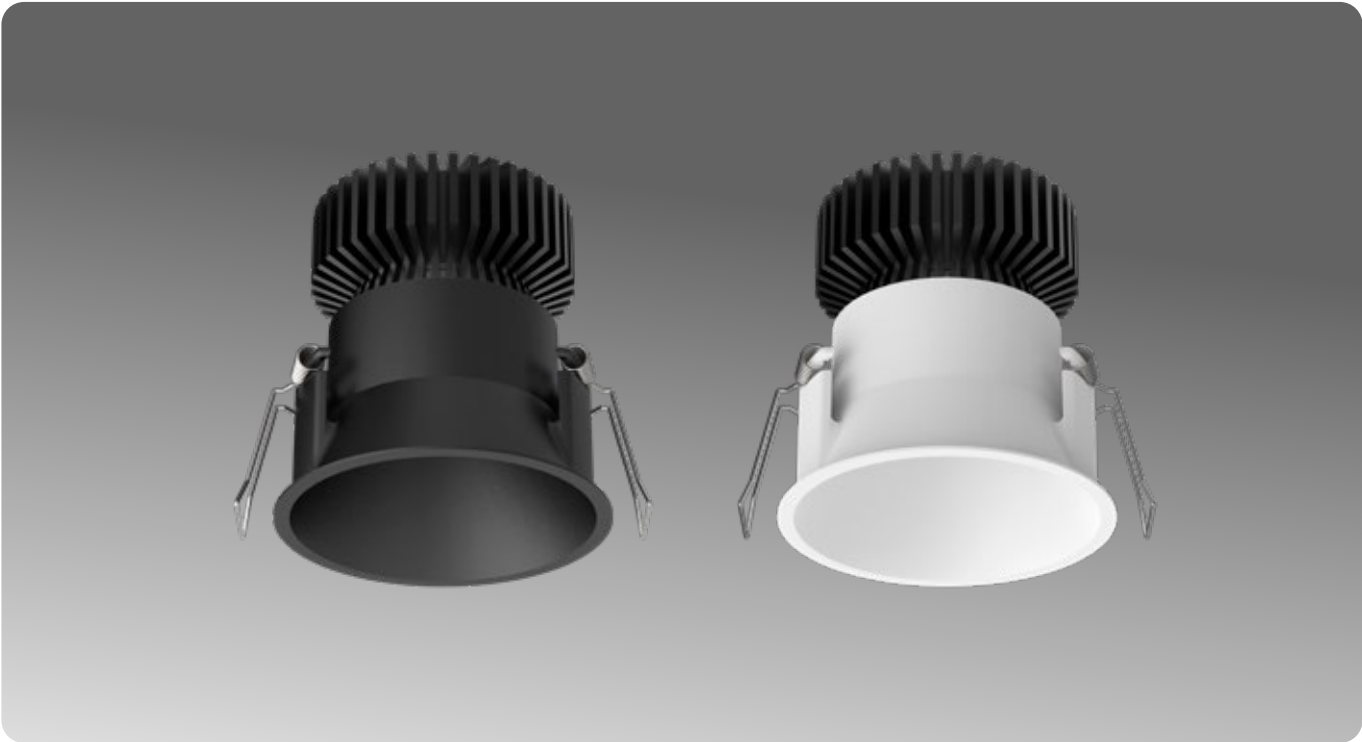

SPECIFICATIONS

| | |
|------------------------|--|
| DIMENSIONS | D80mm x H89mm |
| CUT OUT | Ø 75mm |
| COLOUR TEMP | 3000K Warm White |
| CRI | 97 |
| LIFESPAN | >55,000 hours (L90 B20) |
| BEAM ANGLE | 50° |
| INTENSITY AT 2M | 329 lux / 1.9m beam width (3000K, White) |
| INTENSITY AT 3M | 146 lux / 2.8m beam width (3000K, White) |
| INTENSITY AT 4M | 82 lux / 3.7m beam width (3000K, White) |
| MATERIAL | Aluminium, coated optic glass |
| IP RATING | IP44 |
| CLEARANCE | 25mm recommended for optimum lifespan. 0mm required. Rear of fitting may abut structural members and building elements. |
| CLASSIFICATION | IC Rated |
| DRIVER | DX Series Under Insulation Dimmable TRIAC Driver Included (pre-wired) |
| INSTALLATION | Cut holes with extra caution (5mm rim) |
| APPLICATION | Interior residential downlighting |
| WARRANTY | 5 Year Warranty |

| | | |
|-------------------|-----------------|----------------|
| 922 LUMENS | 11 WATTS | AC 240V |
|-------------------|-----------------|----------------|

| | |
|---|--|
|  | UID™ Dimmable Under Insulation Driver Included |
|---|--|

COLOUR PARAMETERS

| CCT | CRI | CRI R9 | TM30 Rf | TM30 Rg |
|-------|------|--------|---------|---------|
| 3000K | 97.5 | 96.8 | 94.9 | 101.7 |

AVAILABLE IN

| DESCRIPTION | CODE |
|-------------|----------|
| White 3000K | R530 W3K |
| Black 3000K | R530 B3K |