



Mini Constant Voltage IP65 12V / 24V



- Super compact design
- 5 Year Warranty
- Universal AC Input
- Pre wired primary and secondary sides
- Constant Voltage [Parallel Circuit]
- Operating temp range -20.. +50°C
- Overload / Short Circuit Protection
- Overheat protection
- Self extinguishing Plastic housing

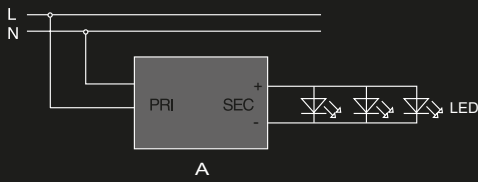

DRMACV

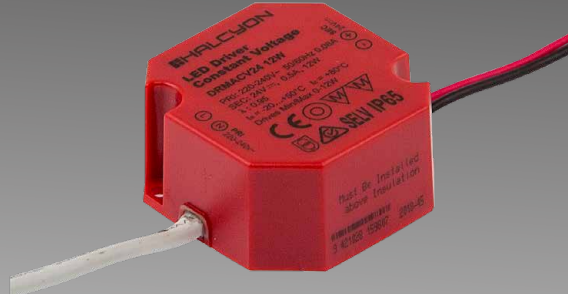

CODE	OUTPUT CURRENT [A]	MAX OUTPUT [W]	INPUT VOLTAGE [V]	OUTPUT VOLTAGE [V]	POWER FACTOR [λ]	DIMENSIONS L x W x H [mm]	INGRESS PROTECTION
DRMACV12 4W	0 - 0.33A	4W	240V	12V	0.40C	L38 x W27 x H21mm	IP65
DRMACV12 12W	0 - 1.0A	12W	240V	12V	0.95	L50 x W48 x H24mm	IP65
DRMACV24 4W	0 - 0.17A	4W	240V	24V	0.40C	L38 x W27 x H21mm	IP65
DRMACV24 12W	0 - 0.5A	12W	240V	24V	0.95	L50 x W48 x H24mm	IP65

Output Power [W]

When choosing a driver the total output power of the lighting must be taken into account. Constant Voltage drivers have a maximum output wattage, you must stay under this parameter for optimal performance and Driver lifespan.

Output Current [A]

When choosing a Constant Voltage LED driver you must observe the current requirements of your light source/s to ensure you are using a big enough driver. A common sign that your circuit exceeds the maximum output current of your chosen driver is flashing / strobing lighting. If in doubt go for a larger output than required.