


# Recessed Downlight Kit Retrofit Smart Tilt IP44

R677

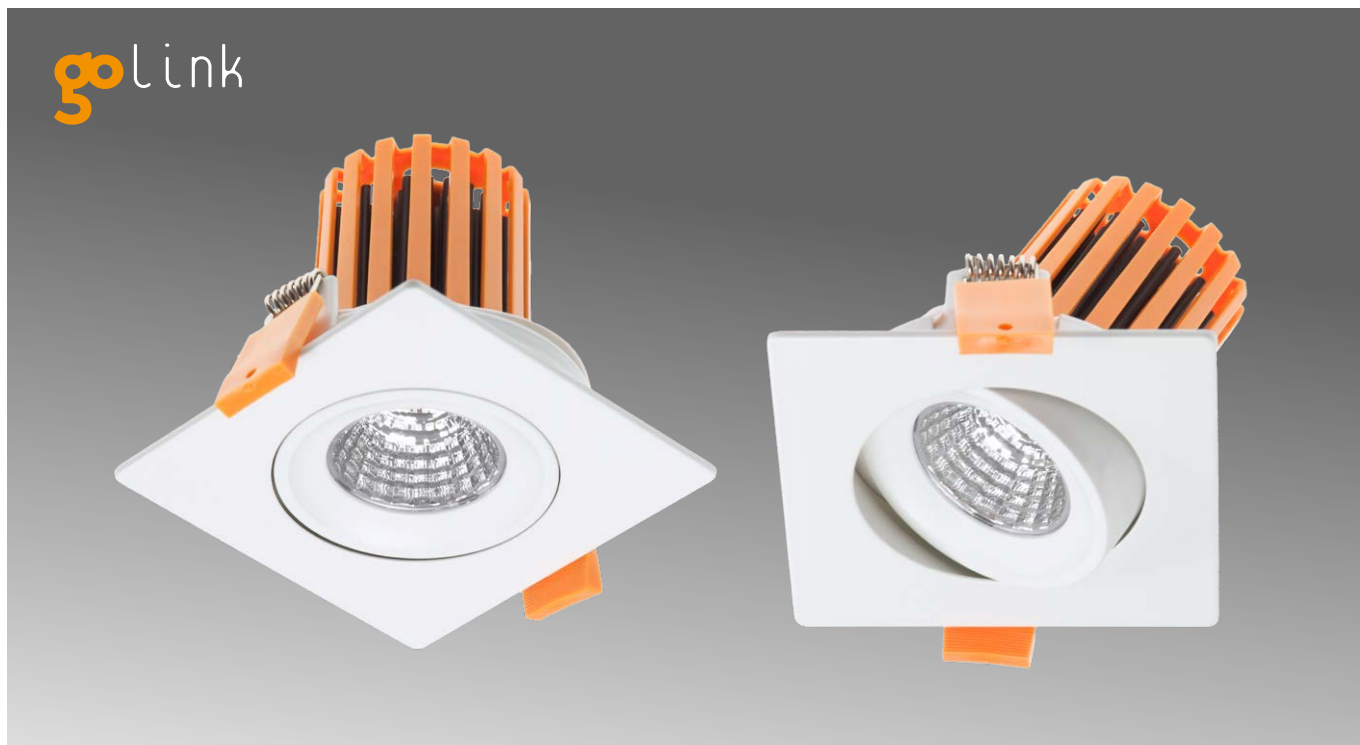

**RETROFIT**

Fits 82mm Cut Outs



## SPECIFICATIONS

<b>DIMENSIONS</b>	L96 x W96 x H79mm
<b>CUT OUT</b>	Ø 82-84mm
<b>CCT / LUMENS</b>	3000K Warm White 830lm 4000K Natural White 870lm 3000-2000K Sunset Dim 550lm
<b>CRI</b>	Standard / CRI90 Sunset Dim / CRI95
<b>LIFESPAN</b>	50,000 Hours (L70)
<b>BEAM ANGLE</b>	60°
<b>TILT ANGLE</b>	30° (Patented IP44 tilt gasket)
<b>MATERIAL</b>	Aluminum and Patented PC Heat Shield
<b>IP RATING</b>	IP44
<b>CLEARANCE</b>	25mm recommended for optimum lifespan. 0mm required. Rear of fitting may abut structural members and building elements.
<b>CLASSIFICATION</b>	IC Rated
<b>DRIVER</b>	Under Insulation Dimmable Go Link 260mA Driver features power indicator safety light
<b>APPLICATION</b>	Interior only, suitable for new and retrofit applications
<b>WARRANTY</b>	5 Year Warranty

<b>&lt;870 LUMENS</b>	<b>9.5 WATTS</b>	<b>AC 240V</b>
---------------------------	----------------------	--------------------

	UID™ Dimmable Under Insulation Go Link Driver Included
---	--

## AVAILABLE IN

DESCRIPTION	CODE
White 3000K	R677 W3K
White 4000K (CRI80, 950lm)	R677 W4K
White 3K-2K Sunset Dim	R677 W32K
Black 3000K	R677 B3K
Silver 3000K	R677 S3K
Brushed Chrome 3000K	R677 BC3K