
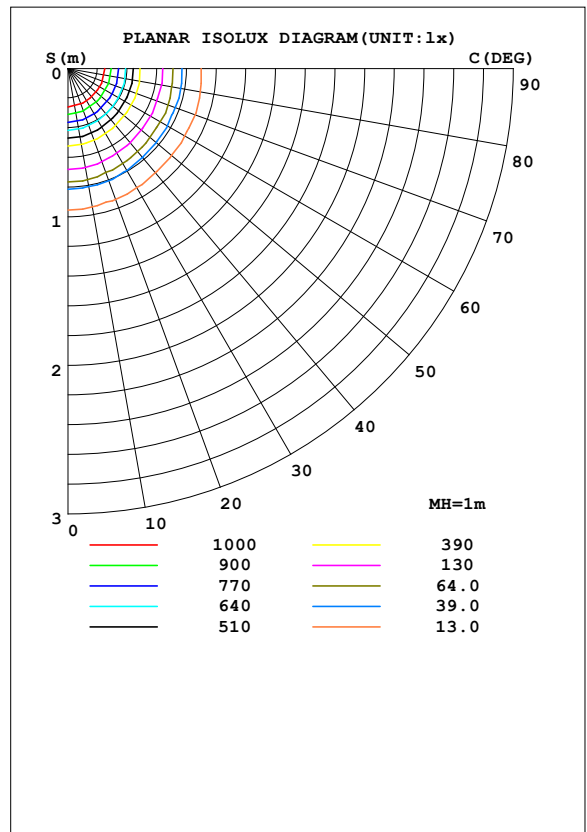


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:240.4V I:0.0421A P:9.435W PF:0.9332 Lamp Flux:839.297x1 lm		
NAME: R730-B3K黑	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: AXG	SUR.:	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 88.96 lm/W			
MODEL		I _{max} (cd)	1287	S/MH (C0/180)	0.78
NOMINAL POWER (W)	10	LOR (%)	100.0	S/MH (C90/270)	0.73
RATED VOLTAGE (V)	240	TOTAL FLUX (lm)	839.30	η UP, DN (C0-180)	0.9, 48.3
NOMINAL FLUX (lm)	839.297	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.8, 50.0
LAMPS INSIDE	1	η up (%)	1.7	CIBSE SHR NOM	0.75
TEST VOLTAGE (V)	240.3	η down (%)	98.3	CIBSE SHR MAX	0.75

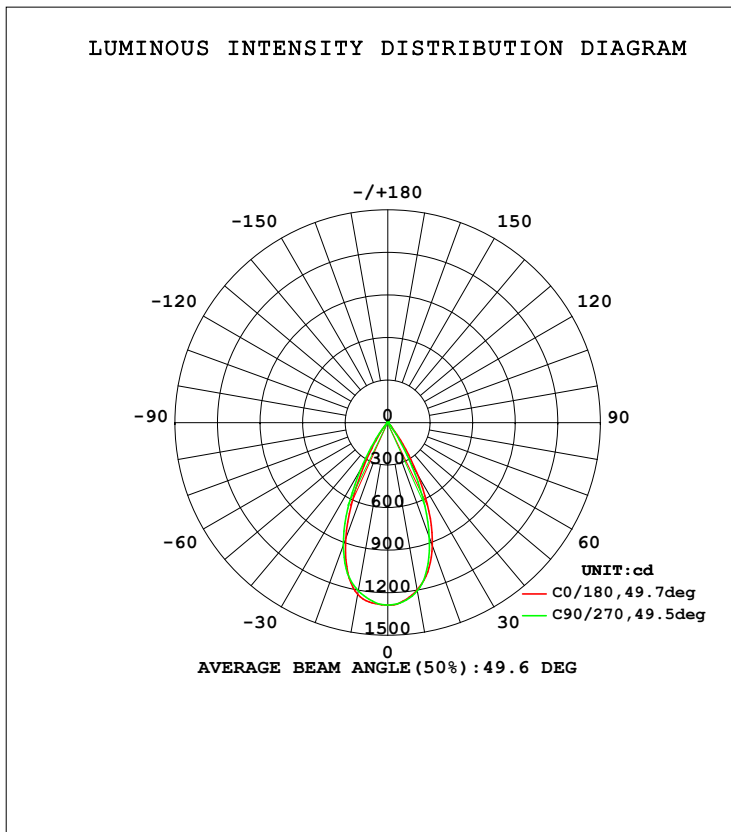

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 03
 Test Date: 2020-06-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.281
 Humidity: 60.0%
 Test Distance: 12.200m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1198	1192	1205	1232	1229	1216	1204	1198	0- 10	119.1	119.1	14.2,14.2
20	921.2	878.5	856.9	869.3	866.0	888.7	918.0	928.5	10- 20	300.1	419.2	49.9,49.9
30	416.1	353.6	309.5	302.1	299.0	335.8	389.5	417.1	20- 30	282.3	701.5	83.6,83.6
40	62.33	47.65	41.36	42.22	44.79	50.55	61.16	62.92	30- 40	102.5	804.0	95.8,95.8
50	10.58	7.645	5.275	4.457	4.304	6.079	8.936	10.22	40- 50	18.29	822.3	98,98
60	0.7988	0.5532	0.5355	0.7189	0.6599	0.6256	0.6242	0.6850	50- 60	2.300	824.6	98.3,98.3
70	0	0	0	0	0	0	0	0	60- 70	0.1565	824.8	98.3,98.3
80	0	0	0	0	0	0	0	0	70- 80	0.0002	824.8	98.3,98.3
90	0	0	0	0	0	0.0002	0	0	80- 90	0.0000	824.8	98.3,98.3
100	0	0	0	0	0.0381	0.0287	0.0290	0.0291	90-100	0.0050	824.8	98.3,98.3
110	0.0477	0.0573	0.1161	0.1254	0.1836	0.1543	0.1358	0.1359	100-110	0.0434	824.8	98.3,98.3
120	0.6136	0.7018	0.7928	0.8416	0.8272	0.7059	0.6205	0.6212	110-120	0.3468	825.2	98.3,98.3
130	2.091	2.206	2.384	2.441	2.298	2.102	1.955	1.954	120-130	1.219	826.4	98.5,98.5
140	4.259	4.412	4.614	4.661	4.435	4.200	4.041	4.038	130-140	2.465	828.9	98.8,98.8
150	6.611	6.769	6.991	7.001	6.767	6.557	6.389	6.366	140-150	3.438	832.3	99.2,99.2
160	8.396	8.463	8.686	8.678	8.503	8.351	8.284	8.159	150-160	3.510	835.8	99.6,99.6
170	9.490	9.574	9.693	9.825	9.654	9.557	9.424	9.400	160-170	2.547	838.4	99.9,99.9
180	10.18	10.23	10.20	10.30	10.20	10.24	10.22	10.31	170-180	0.9414	839.3	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:03
 Test Date:2020-06-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.281
 Humidity:60.0%
 Test Distance:12.200m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.4V I:0.0421A P:9.435W PF:0.9332 Lamp Flux:839.297x1 lm		
NAME: R730-B3K黑	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: AXG	SUR.:	PROTECTION ANGLE:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.00	1.00	1.00	.98
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.04	1.03	1.01	1.00	.99	.98	.97	.96	.95	.93
2.0	1.04	1.01	.98	1.02	.99	.96	.99	.96	.94	.96	.94	.92	.93	.91	.90	.88
3.0	.98	.94	.90	.97	.93	.89	.94	.90	.88	.91	.88	.86	.89	.87	.85	.83
4.0	.93	.88	.84	.91	.87	.83	.89	.85	.82	.87	.84	.81	.85	.82	.80	.78
5.0	.88	.82	.78	.87	.82	.78	.85	.80	.77	.83	.79	.76	.81	.78	.76	.74
6.0	.83	.78	.74	.82	.77	.73	.80	.76	.73	.79	.75	.72	.78	.74	.72	.70
7.0	.79	.73	.70	.78	.73	.69	.77	.72	.69	.75	.71	.68	.74	.71	.68	.67
8.0	.75	.69	.66	.74	.69	.66	.73	.68	.65	.72	.68	.65	.71	.67	.64	.63
9.0	.71	.66	.62	.71	.66	.62	.70	.65	.62	.69	.65	.62	.68	.64	.61	.60
10.0	.68	.63	.59	.68	.63	.59	.67	.62	.59	.66	.62	.59	.65	.61	.58	.57

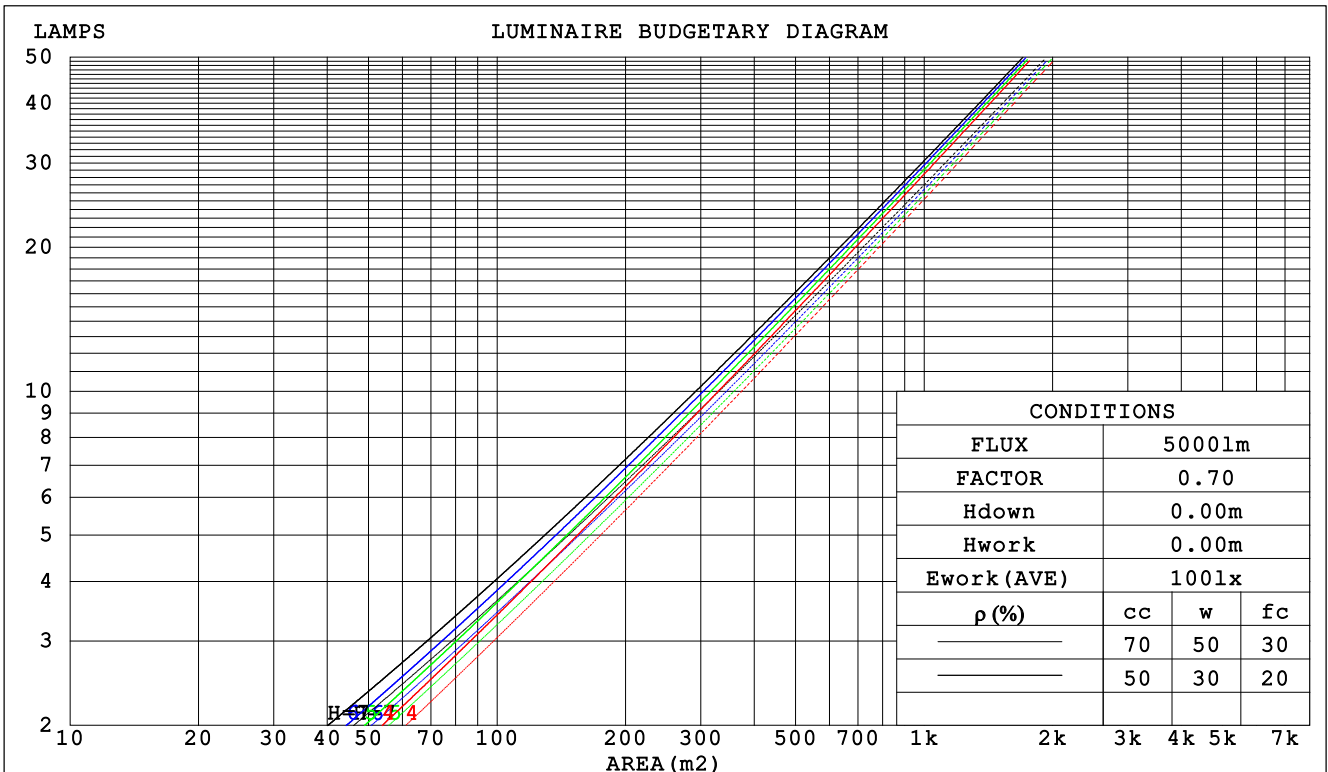

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:03
 Test Date:2020-06-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.281
 Humidity:60.0%
 Test Distance:12.200m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:240.4V I:0.0421A P:9.435W PF:0.9332 Lamp Flux:839.297x1 lm												
NAME: R730-B3K黑						TYPE:			WEIGHT:			
SPEC.:						DIM.:			SERIAL No.:1			
MFR.: AXG						SUR.:			PROTECTION ANGLE:			

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.164	.093	.030	.157	.089	.028	.143	.082	.026	.131	.075	.024	.119	.069	.022	
2.0	.155	.085	.026	.149	.082	.025	.138	.077	.024	.127	.071	.022	.118	.067	.021	
3.0	.147	.078	.023	.142	.076	.023	.132	.072	.022	.123	.068	.021	.115	.064	.020	
4.0	.140	.073	.021	.135	.071	.021	.127	.067	.020	.119	.064	.019	.112	.061	.019	
5.0	.133	.068	.020	.129	.066	.019	.122	.063	.019	.115	.061	.018	.109	.058	.017	
6.0	.127	.064	.018	.124	.062	.018	.117	.060	.017	.111	.058	.017	.106	.056	.017	
7.0	.122	.060	.017	.119	.059	.017	.113	.057	.016	.107	.055	.016	.102	.053	.016	
8.0	.117	.057	.016	.114	.056	.016	.109	.054	.016	.104	.053	.015	.099	.051	.015	
9.0	.112	.054	.015	.109	.053	.015	.105	.052	.015	.100	.050	.014	.096	.049	.014	
10.0	.108	.052	.014	.105	.051	.014	.101	.050	.014	.097	.048	.014	.093	.047	.013	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.204	.204	.204	.174	.174	.174	.119	.119	.119	.068	.068	.068	.022	.022	.022	
1.0	.183	.171	.159	.157	.147	.137	.107	.101	.095	.062	.058	.055	.020	.019	.018	
2.0	.167	.146	.128	.143	.126	.111	.098	.087	.077	.057	.051	.045	.018	.016	.015	
3.0	.154	.127	.105	.132	.109	.091	.091	.076	.064	.052	.044	.038	.017	.014	.012	
4.0	.143	.112	.088	.123	.097	.077	.085	.067	.054	.049	.040	.032	.016	.013	.010	
5.0	.134	.100	.075	.115	.087	.065	.079	.061	.046	.046	.036	.027	.015	.012	.009	
6.0	.127	.091	.065	.109	.079	.057	.075	.055	.040	.044	.032	.024	.014	.011	.008	
7.0	.120	.083	.057	.103	.072	.050	.071	.051	.035	.041	.030	.021	.013	.010	.007	
8.0	.114	.077	.051	.098	.067	.045	.068	.047	.032	.040	.028	.019	.013	.009	.006	
9.0	.109	.072	.046	.094	.062	.040	.065	.044	.029	.038	.026	.017	.012	.008	.006	
10.0	.104	.067	.042	.090	.058	.037	.062	.041	.026	.036	.024	.016	.012	.008	.005	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:03
 Test Date:2020-06-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.281
 Humidity:60.0%
 Test Distance:12.200m [K=1.0000]
 Remarks:

Uncorrected UGR Table

Test:U:240.4V I:0.0421A P:9.435W PF:0.9332 Lamp Flux:839.297x1 lm										
NAME: R730-B3K黑					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:1		
MFR.: AXG					SUR.:			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.4	17.3	16.7	17.5	17.7	14.6	15.4	14.8	15.6	15.8
3H	16.3	17.0	16.5	17.3	17.5	14.4	15.2	14.7	15.4	15.6
4H	16.2	16.9	16.5	17.2	17.4	14.3	15.0	14.6	15.3	15.5
6H	16.1	16.8	16.4	17.0	17.3	14.2	14.9	14.5	15.2	15.4
8H	16.0	16.7	16.4	17.0	17.3	14.2	14.8	14.5	15.1	15.4
12H	16.0	16.6	16.3	16.9	17.2	14.1	14.7	14.5	15.0	15.3
4H 2H	16.2	16.9	16.5	17.2	17.4	14.3	15.0	14.6	15.3	15.5
3H	16.0	16.6	16.3	16.9	17.2	14.1	14.7	14.5	15.0	15.3
4H	15.9	16.5	16.3	16.8	17.1	14.0	14.6	14.4	14.9	15.2
6H	15.8	16.3	16.2	16.7	17.0	13.9	14.4	14.3	14.8	15.2
8H	15.7	16.2	16.2	16.6	17.0	13.9	14.3	14.3	14.7	15.1
12H	15.7	16.1	16.1	16.5	16.9	13.8	14.2	14.2	14.6	15.0
8H 4H	15.7	16.2	16.2	16.6	17.0	13.9	14.3	14.3	14.7	15.1
6H	15.6	16.0	16.1	16.4	16.9	13.7	14.1	14.2	14.5	15.0
8H	15.6	15.9	16.0	16.4	16.8	13.7	14.0	14.2	14.5	14.9
12H	15.5	15.8	16.0	16.3	16.8	13.6	13.9	14.1	14.4	14.9
12H 4H	15.7	16.1	16.1	16.5	16.9	13.8	14.2	14.2	14.6	15.0
6H	15.6	15.9	16.0	16.4	16.8	13.7	14.0	14.2	14.5	14.9
8H	15.5	15.8	16.0	16.3	16.8	13.6	13.9	14.1	14.4	14.9
Variations with the observer position at spacings:										
S = 1.0H	+ 4.4 / -19.4					+ 3.8 / -19.6				
1.5H	+ 6.7 / -15.1					+ 6.1 / -14.2				
2.0H	+ 7.3 / -24.3					+ 7.2 / -27.4				

CIE Pub.117 Corrected 839.3 lm Total Lamp Luminous Flux. (8log(F/F0) = -0.6)

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:03
 Test Date:2020-06-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.281
 Humidity:60.0%
 Test Distance:12.200m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.4V I:0.0421A P:9.435W PF:0.9332 Lamp Flux:839.297x1 lm		
NAME: R730-B3K黑	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: AXG	SUR.:	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	89	83	79	88	83	79	88	82	79	76
0.80	96	91	87	95	90	87	94	90	87	83
1.00	100	95	92	99	94	91	98	94	91	87
1.25	104	99	96	103	98	95	101	97	94	90
1.50	106	102	99	105	101	98	103	100	97	92
2.00	109	105	102	107	104	101	104	102	99	94
2.50	110	107	104	109	105	103	105	103	101	95
3.00	112	109	106	110	107	105	106	104	102	96
4.00	114	111	109	112	109	108	108	106	105	97
5.00	115	113	111	113	111	109	108	107	106	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:03
 Test Date:2020-06-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.281
 Humidity:60.0%
 Test Distance:12.200m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:240.4V I:0.0421A P:9.435W PF:0.9332 Lamp Flux:839.297x1 lm		
NAME: R730-B3K黑	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: AXG	SUR.:	PROTECTION ANGLE:

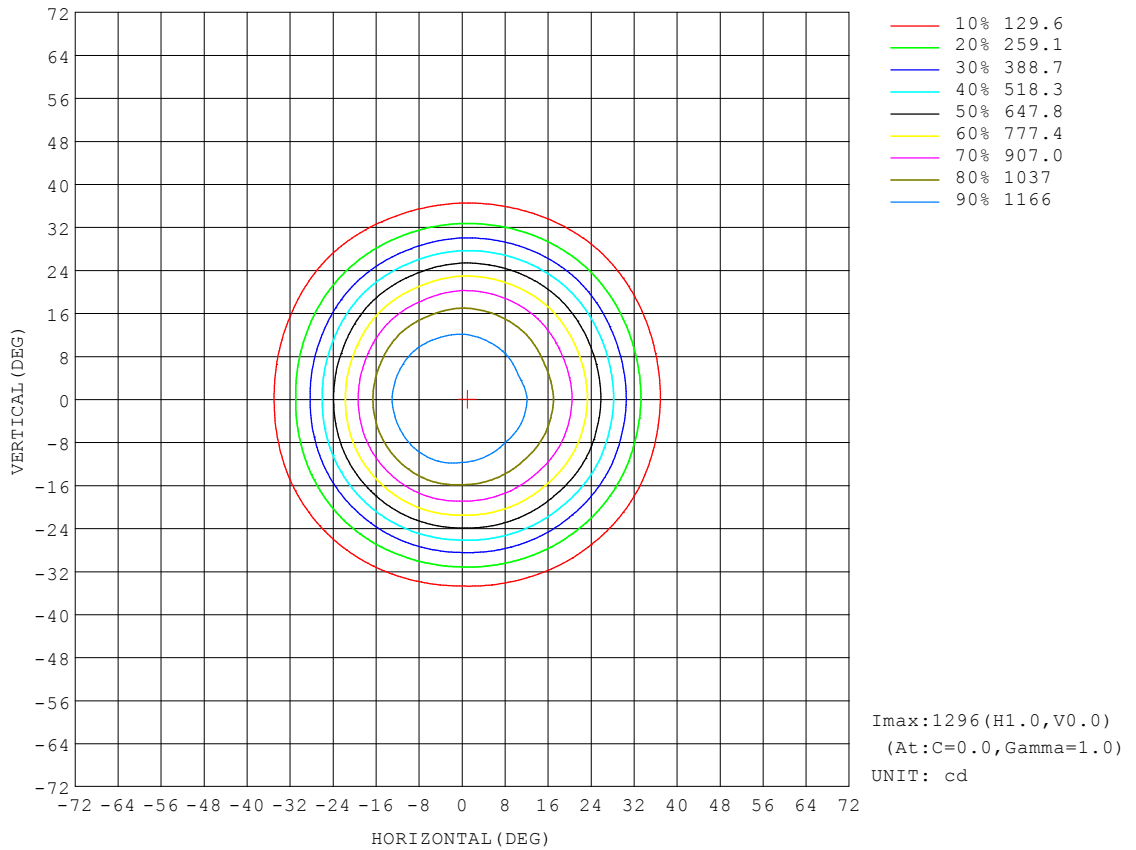


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:03
 Test Date:2020-06-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.281
 Humidity:60.0%
 Test Distance:12.200m [K=1.0000]
 Remarks:

AAI Figure

Test:U:240.4V I:0.0421A P:9.435W PF:0.9332 Lamp Flux:839.297x1 lm		
NAME: R730-B3K黑	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: AXG	SUR.:	PROTECTION ANGLE:

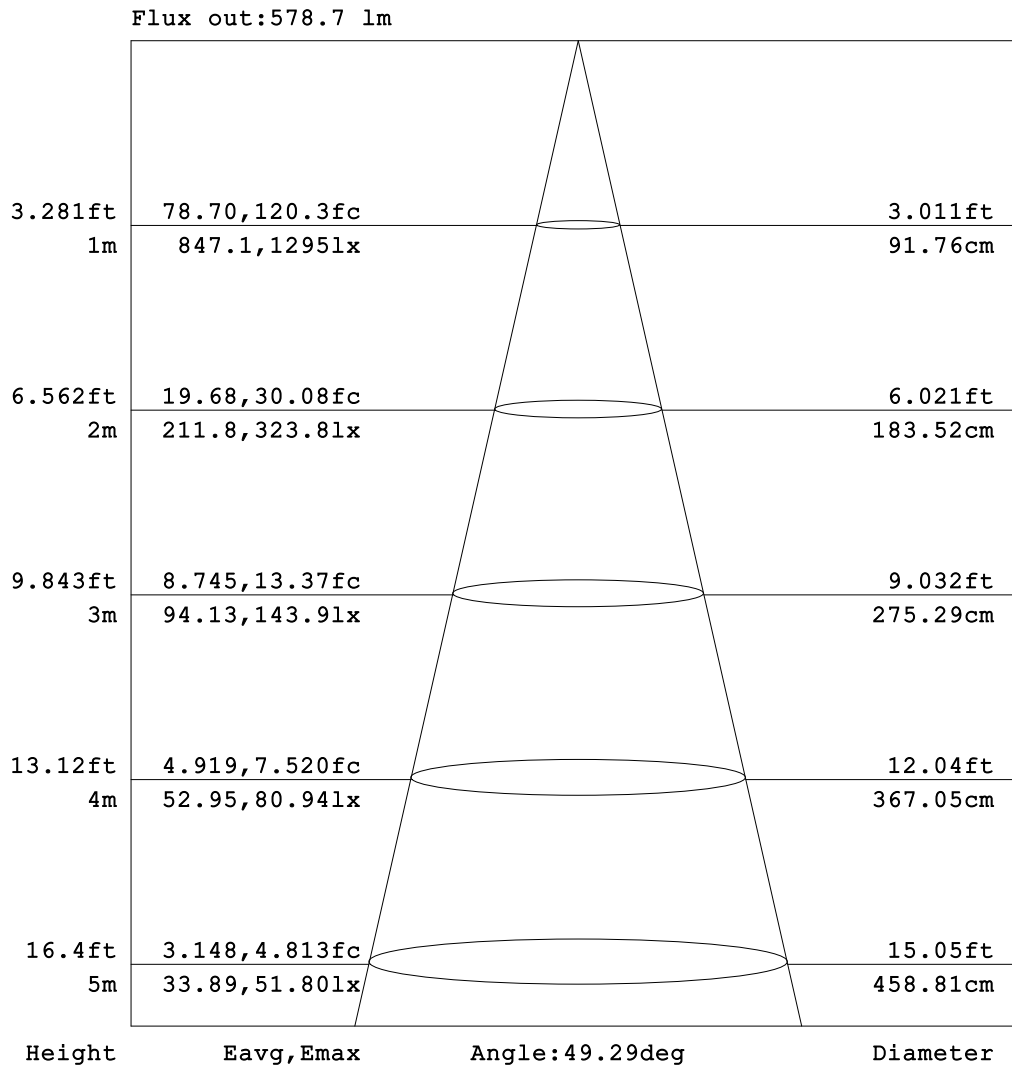


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 03
 Test Date: 2020-06-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.281
 Humidity: 60.0%
 Test Distance: 12.200m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:240.4V I:0.0421A P:9.435W PF:0.9332 Lamp Flux:839.297x1 lm		
NAME: R730-B3K黑	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: AXG	SUR.:	PROTECTION ANGLE:

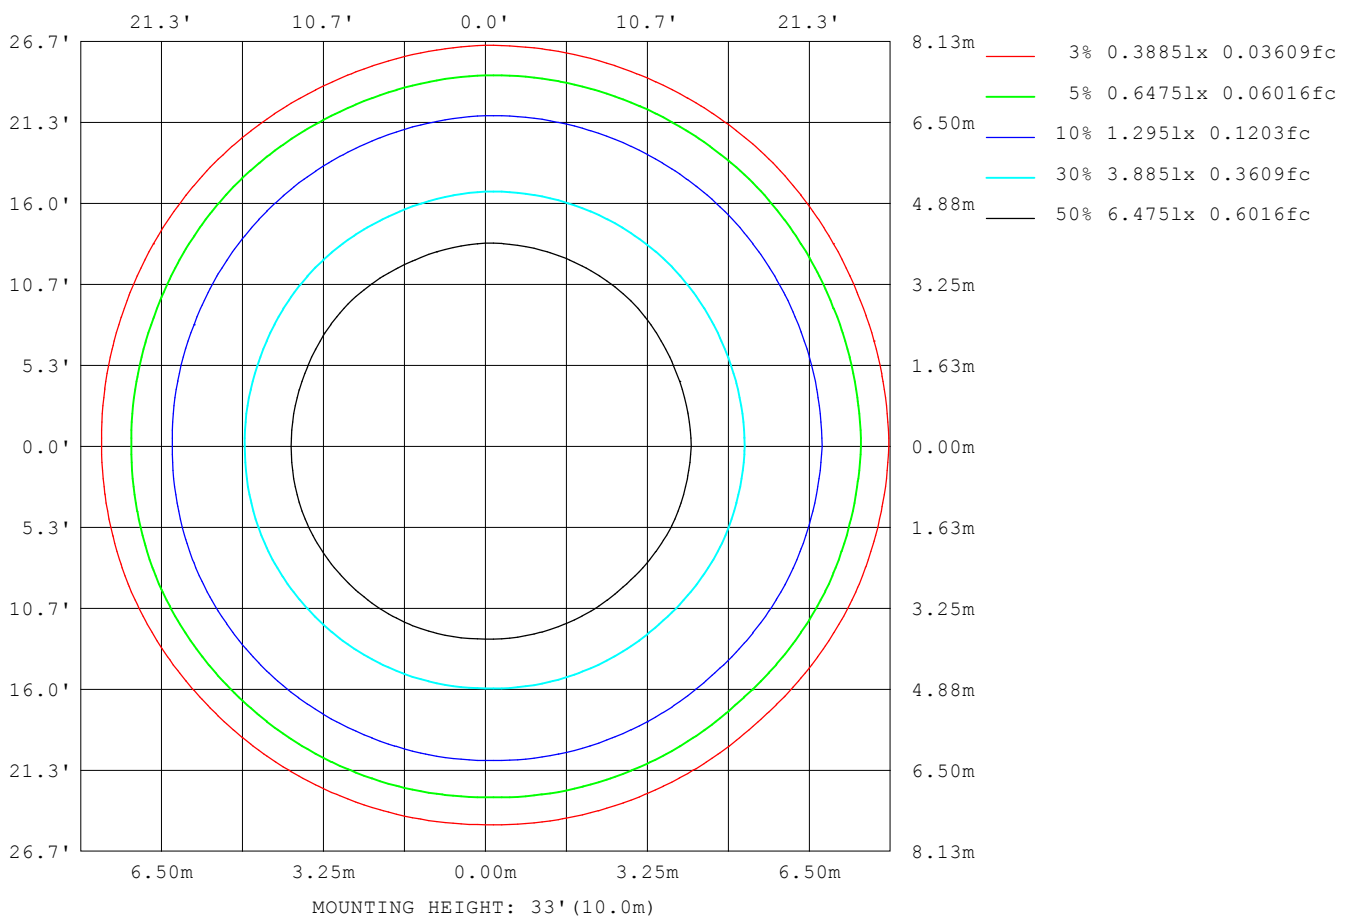

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:03
 Test Date:2020-06-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.281
 Humidity:60.0%
 Test Distance:12.200m [K=1.0000]
 Remarks:

Planar Illuminance Curve

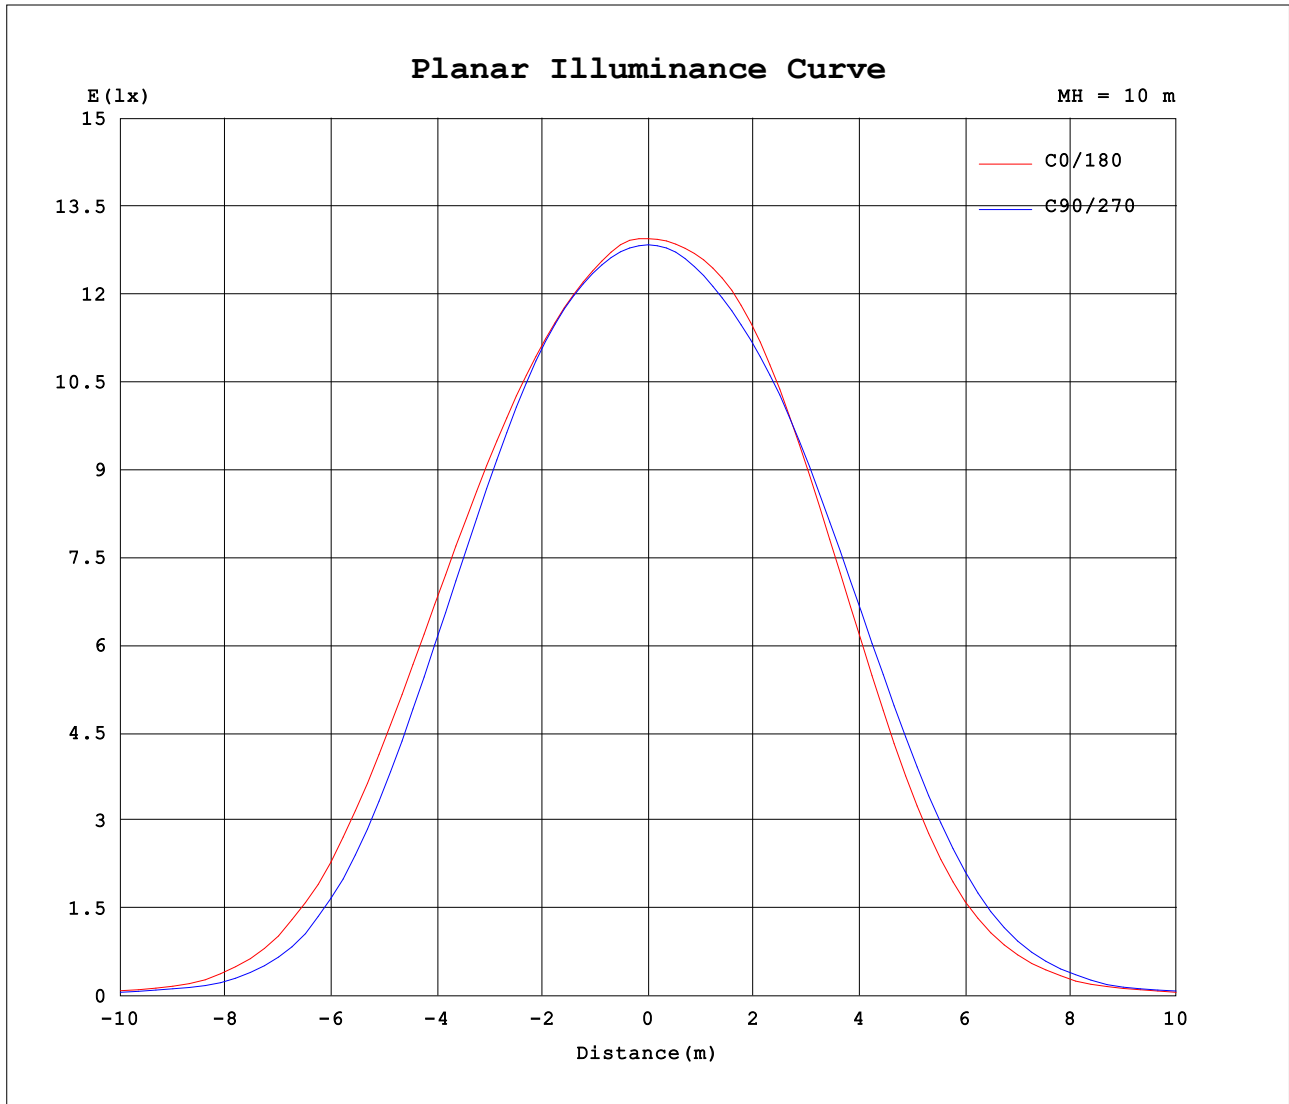

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 03
 Test Date: 2020-06-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.281
 Humidity: 60.0%
 Test Distance: 12.200m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:240.4V I:0.0421A P:9.435W PF:0.9332 Lamp Flux:839.297x1 lm		
NAME: R730-B3K黑	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: AXG	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	23	45	68	90	113	135	158	180	203	225	248	270	293	315	338			
0	1286	1286	1286	1286	1286	1286	1286	1286	1286	1286	1286	1286	1286	1286	1286	1286			
5	1263	1266	1264	1264	1266	1273	1277	1278	1276	1272	1268	1264	1263	1259	1258	1257			
10	1198	1197	1192	1197	1205	1220	1232	1236	1229	1222	1216	1206	1204	1198	1198	1195			
15	1090	1085	1069	1070	1070	1087	1096	1103	1093	1092	1098	1093	1100	1097	1097	1090			
20	921	909	878	866	857	867	869	878	866	871	889	894	918	924	929	922			
25	688	669	626	606	587	586	583	586	576	586	616	634	668	681	695	690			
30	416	395	354	332	309	307	302	306	299	309	336	355	389	405	417	412			
35	187	171	144	132	122	122	124	130	128	132	145	154	172	180	188	186			
40	62.3	57.0	47.7	44.5	41.4	41.9	42.2	44.5	44.8	45.7	50.5	53.9	61.2	61.8	62.9	60.6			
45	26.5	25.1	22.7	21.6	19.8	19.1	18.4	19.0	19.0	20.0	22.5	23.6	25.1	25.6	26.3	25.9			
50	10.6	9.62	7.65	6.40	5.28	4.79	4.46	4.43	4.30	4.80	6.08	7.22	8.94	9.77	10.2	10.1			
55	2.87	2.60	2.16	1.85	1.66	1.61	1.61	1.57	1.56	1.70	1.85	2.06	2.43	2.60	2.77	2.77			
60	0.80	0.59	0.55	0.43	0.54	0.54	0.72	0.67	0.66	0.71	0.63	0.70	0.62	0.73	0.69	0.77			
65	0.12	0.00	0.05	0.00	0.01	0.00	0.02	0.00	0.00	0.04	0.00	0.06	0.00	0.10	0.01	0.13			
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01			
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.00	0.00	0.00	0.00	0.00	0.01	0.00			
100	0.00	0.02	0.00	0.02	0.00	0.04	0.00	0.02	0.04	0.00	0.03	0.00	0.03	0.00	0.03	0.00			
105	0.00	0.06	0.00	0.08	0.00	0.08	0.00	0.09	0.08	0.00	0.08	0.00	0.06	0.00	0.06	0.00			
110	0.05	0.15	0.06	0.16	0.12	0.20	0.13	0.20	0.18	0.10	0.15	0.03	0.14	0.02	0.14	0.03			
115	0.25	0.35	0.28	0.40	0.34	0.45	0.38	0.45	0.40	0.29	0.33	0.22	0.29	0.19	0.30	0.19			
120	0.61	0.72	0.70	0.82	0.79	0.90	0.84	0.92	0.83	0.70	0.71	0.60	0.62	0.54	0.62	0.54			
125	1.24	1.32	1.35	1.46	1.48	1.56	1.53	1.60	1.46	1.32	1.28	1.17	1.18	1.09	1.17	1.12			
130	2.09	2.16	2.21	2.33	2.38	2.46	2.44	2.49	2.30	2.18	2.10	1.98	1.96	1.90	1.95	1.93			
135	3.10	3.19	3.24	3.35	3.43	3.49	3.49	3.51	3.31	3.19	3.09	2.98	2.94	2.90	2.93	2.93			
140	4.26	4.31	4.41	4.51	4.61	4.64	4.66	4.66	4.44	4.33	4.20	4.11	4.04	4.02	4.04	4.05			
145	5.44	5.50	5.62	5.70	5.82	5.85	5.87	5.85	5.63	5.54	5.43	5.33	5.21	5.21	5.23	5.25			
150	6.61	6.63	6.77	6.85	6.99	6.99	7.00	6.98	6.77	6.69	6.56	6.50	6.39	6.38	6.37	6.39			
155	7.66	7.63	7.73	7.83	7.97	7.97	7.95	7.96	7.75	7.67	7.59	7.54	7.45	7.43	7.37	7.39			
160	8.40	8.41	8.46	8.58	8.69	8.68	8.68	8.74	8.50	8.45	8.35	8.34	8.28	8.23	8.16	8.19			
165	8.99	9.00	9.05	9.16	9.27	9.26	9.28	9.37	9.16	9.10	9.00	8.97	8.94	8.89	8.80	8.81			
170	9.49	9.50	9.57	9.64	9.69	9.74	9.82	9.87	9.65	9.65	9.56	9.48	9.42	9.43	9.40	9.41			
175	9.91	9.92	9.98	10.0	10.0	10.1	10.2	10.2	10.0	10.0	10.0	9.93	9.88	9.92	9.95	9.93			
180	10.2	10.2	10.2	10.2	10.2	10.2	10.3	10.3	10.2	10.2	10.2	10.2	10.2	10.2	10.3	10.3			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:03
 Test Date:2020-06-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.281
 Humidity:60.0%
 Test Distance:12.200m [K=1.0000]
 Remarks: