


Recessed Downlight Kit
X-low Glare Smart Tilt Design Standard Series

R750

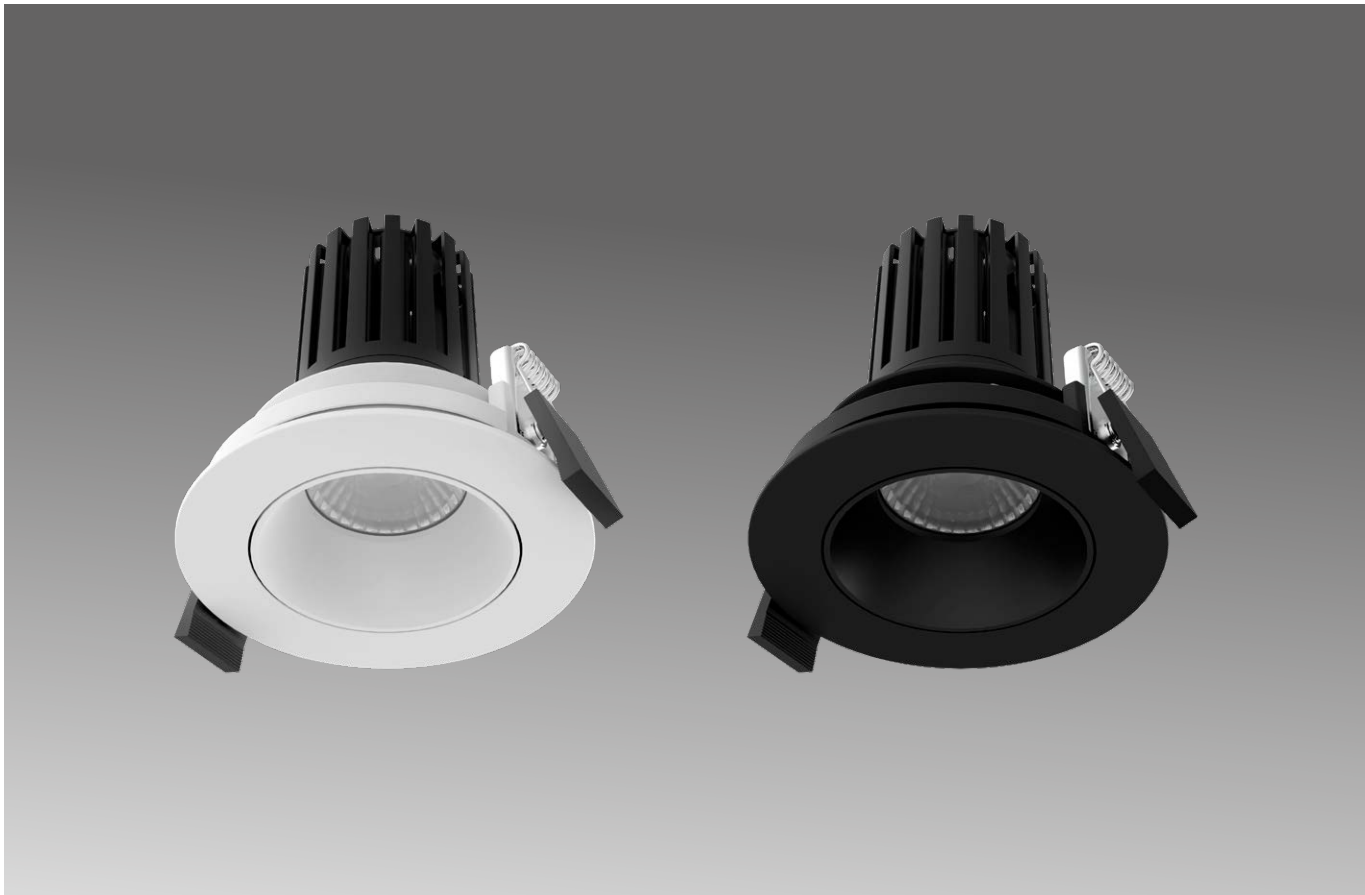

SPECIFICATIONS

DIMENSIONS	D100 x H101mm
CUT OUT	Ø 92mm
COLOUR TEMP	3000K Warm White
CRI	90
LIFESPAN	50,000hrs
UGR	Suitable for installations requiring UGR of less than 16.
BEAM ANGLE	50°
TILT ANGLE	32°
MATERIAL	Aluminium + PC
IP RATING	IP54 (Complete with patented tilt gasket)
CLEARANCE	25mm recommended for optimum lifespan. 0mm required. Rear of fitting may abut structural members and building elements.
CLASSIFICATION	IC-F / IC-4
DRIVER	DX Series Under Insulation Dimmable TRIAC Driver Included (pre-wired) 230mA
APPLICATION	Residential / Commercial Interior
WARRANTY	5 Year Warranty

840 LUMENS	9.5 WATTS	AC 240V
-------------------	------------------	----------------

	UID™ Dimmable Under Insulation Driver Included
---	--

AVAILABLE IN

DESCRIPTION	CODE
White 3000K	R750 W3K
Black 3000K	R750 B3K