
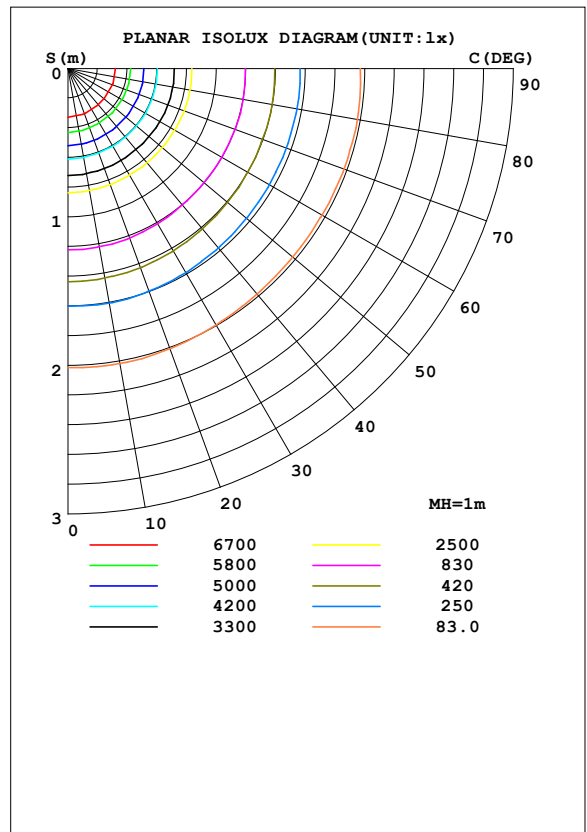


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:240.2V I:0.4252A P:96.98W PF:0.9496 Lamp Flux:17742.1x1 lm		
NAME: P700 4KA - 96W	TYPE:	WEIGHT:
SPEC.:	DIM.: 0.0870000	SERIAL No.:1
MFR.: HALCYON	SUR.:	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 182.94 lm/W			
MODEL		I _{max} (cd)	8342	S/MH (C0/180)	1.23
NOMINAL POWER (W)	98	LOR (%)	100.0	S/MH (C90/270)	1.22
RATED VOLTAGE (V)	240	TOTAL FLUX (lm)	17742	η UP, DN (C0-180)	0.9, 47.1
NOMINAL FLUX (lm)	17742.1	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.8, 51.1
LAMPS INSIDE	1	η up (%)	1.7	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	240.2	η down (%)	98.3	CIBSE SHR MAX	1.35

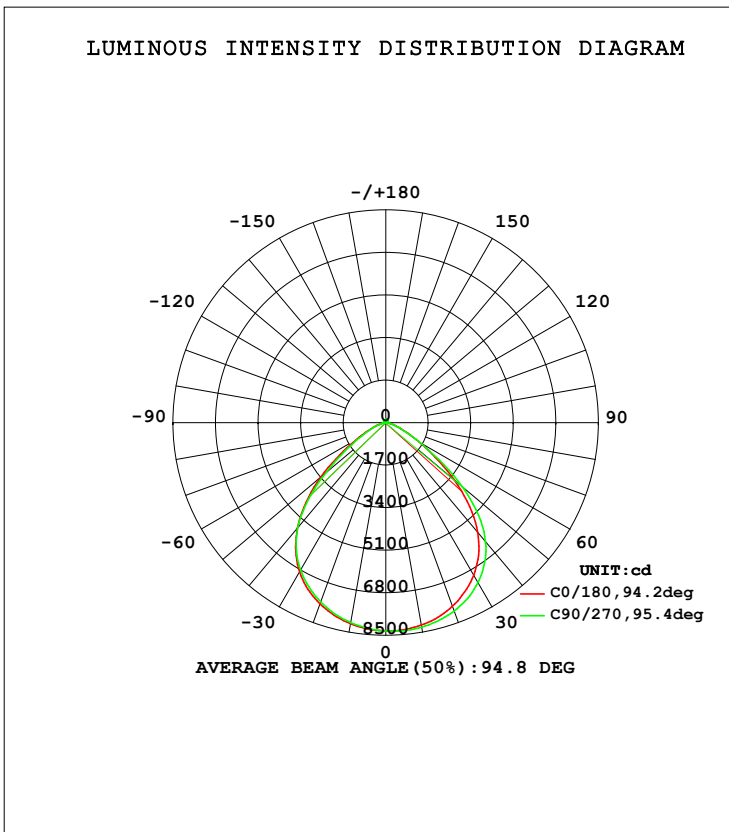

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 03
 Test Date: 2022-01-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.281
 Humidity: 60.0%
 Test Distance: 12.020m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	8159	8112	8109	8141	8216	8284	8297	8241	0- 10	788.5	788.5	4.44,4.44
20	7702	7619	7619	7661	7805	7971	8007	7867	10- 20	2265	3054	17.2,17.2
30	6890	6798	6804	6837	7031	7300	7377	7144	20- 30	3431	6485	36.6,36.6
40	5490	5410	5471	5459	5722	6092	6195	5842	30- 40	4022	10506	59.2,59.2
50	3394	3183	3148	3248	3590	3959	4020	3689	40- 50	3605	14111	79.5,79.5
60	1369	1267	1229	1378	1529	1615	1531	1551	50- 60	2119	16230	91.5,91.5
70	468.4	424.6	409.6	461.9	525.3	542.1	493.9	524.1	60- 70	872.2	17102	96.4,96.4
80	102.4	91.69	91.26	102.7	121.1	129.2	121.2	118.6	70- 80	278.3	17380	98,98
90	5.949	6.215	6.113	6.146	5.720	6.600	6.028	5.144	80- 90	51.81	17432	98.3,98.3
100	13.51	14.45	14.42	13.88	11.95	11.07	10.88	11.55	90-100	9.459	17442	98.3,98.3
110	26.60	28.33	28.48	27.24	23.88	22.60	22.42	23.32	100-110	19.64	17461	98.4,98.4
120	43.56	45.94	46.27	44.49	39.95	38.41	38.27	39.35	110-120	33.08	17494	98.6,98.6
130	62.67	65.11	65.60	63.59	57.89	56.26	56.15	57.31	120-130	45.82	17540	98.9,98.9
140	80.60	82.58	83.32	81.60	76.12	74.24	74.14	75.36	130-140	53.76	17594	99.2,99.2
150	96.98	98.96	99.95	98.66	93.09	91.16	90.89	92.20	140-150	54.34	17648	99.5,99.5
160	113.6	115.5	116.7	115.5	110.4	109.0	108.8	109.9	150-160	47.86	17696	99.7,99.7
170	126.2	127.7	128.4	128.1	124.7	124.2	124.2	124.7	160-170	33.75	17730	99.9,99.9
180	129.6	130.3	130.2	130.8	129.6	130.3	130.2	130.9	170-180	12.24	17742	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:03
 Test Date:2022-01-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.281
 Humidity:60.0%
 Test Distance:12.020m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.2V I:0.4252A P:96.98W PF:0.9496 Lamp Flux:17742.1x1 lm		
NAME: P700 4KA - 96W	TYPE:	WEIGHT:
SPEC.:	DIM.: 0.0870000	SERIAL No.:1
MFR.: HALCYON	SUR.:	PROTECTION ANGLE:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.00	1.00	1.00	.98
1.0	1.07	1.04	1.01	1.05	1.02	.99	1.00	.98	.96	.96	.94	.92	.92	.91	.89	.87
2.0	.96	.90	.86	.94	.89	.85	.90	.86	.83	.87	.83	.80	.84	.81	.78	.76
3.0	.86	.79	.74	.85	.78	.73	.82	.76	.72	.79	.74	.70	.76	.72	.69	.67
4.0	.78	.70	.64	.76	.69	.64	.74	.68	.63	.71	.66	.62	.69	.65	.61	.59
5.0	.70	.63	.57	.69	.62	.56	.67	.61	.56	.65	.59	.55	.63	.58	.54	.52
6.0	.64	.56	.50	.63	.56	.50	.61	.54	.50	.59	.53	.49	.58	.53	.49	.47
7.0	.58	.51	.45	.58	.50	.45	.56	.49	.44	.54	.48	.44	.53	.48	.44	.42
8.0	.54	.46	.41	.53	.46	.40	.52	.45	.40	.50	.44	.40	.49	.44	.39	.38
9.0	.49	.42	.37	.49	.42	.37	.48	.41	.36	.46	.40	.36	.45	.40	.36	.34
10.0	.46	.38	.34	.45	.38	.33	.44	.38	.33	.43	.37	.33	.42	.37	.33	.31

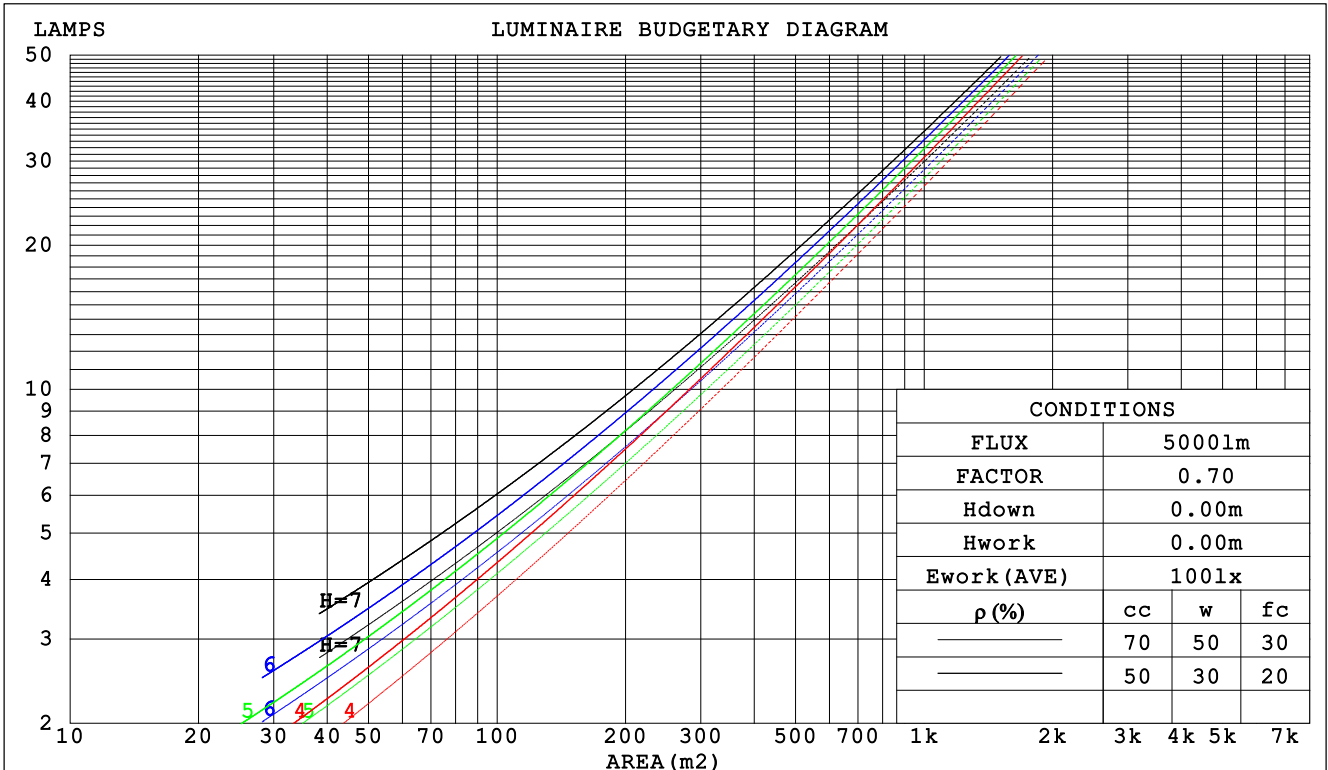

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:03
Test Date:2022-01-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.281
Humidity:60.0%
Test Distance:12.020m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:240.2V I:0.4252A P:96.98W PF:0.9496 Lamp Flux:17742.1x1 lm		
NAME: P700 4KA - 96W	TYPE:	WEIGHT:
SPEC.:	DIM.: 0.0870000	SERIAL No.:1
MFR.: HALCYON	SUR.:	PROTECTION ANGLE:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.240	.137	.043	.233	.133	.042	.219	.126	.040	.206	.119	.038	.194	.113	.036	
2.0	.234	.128	.039	.228	.125	.039	.216	.120	.037	.205	.115	.036	.194	.110	.035	
3.0	.223	.119	.036	.218	.117	.035	.207	.112	.034	.197	.108	.033	.188	.104	.032	
4.0	.211	.110	.032	.206	.108	.032	.197	.104	.031	.188	.101	.030	.180	.098	.030	
5.0	.199	.102	.029	.195	.100	.029	.187	.097	.029	.179	.094	.028	.171	.092	.028	
6.0	.188	.094	.027	.184	.093	.027	.177	.091	.026	.170	.088	.026	.163	.086	.025	
7.0	.178	.088	.025	.174	.087	.025	.167	.085	.024	.161	.082	.024	.155	.081	.024	
8.0	.168	.082	.023	.165	.081	.023	.159	.079	.023	.153	.077	.022	.147	.076	.022	
9.0	.159	.077	.021	.156	.076	.021	.150	.074	.021	.145	.073	.021	.140	.071	.021	
10.0	.151	.072	.020	.148	.072	.020	.143	.070	.020	.138	.069	.020	.134	.067	.019	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.204	.204	.204	.174	.174	.174	.119	.119	.119	.068	.068	.068	.022	.022	.022	
1.0	.189	.170	.153	.162	.146	.132	.111	.100	.091	.064	.058	.053	.020	.019	.017	
2.0	.178	.146	.118	.153	.125	.102	.105	.087	.071	.060	.050	.042	.019	.016	.014	
3.0	.169	.128	.094	.145	.110	.082	.100	.076	.057	.057	.045	.034	.018	.014	.011	
4.0	.161	.114	.078	.138	.098	.067	.095	.069	.047	.055	.040	.028	.018	.013	.009	
5.0	.154	.103	.065	.132	.089	.057	.091	.062	.040	.053	.037	.024	.017	.012	.008	
6.0	.147	.094	.057	.127	.082	.049	.087	.057	.035	.051	.034	.021	.016	.011	.007	
7.0	.141	.087	.050	.121	.076	.043	.084	.053	.031	.049	.031	.018	.016	.010	.006	
8.0	.135	.082	.045	.117	.071	.039	.081	.050	.028	.047	.029	.017	.015	.010	.005	
9.0	.130	.077	.041	.112	.067	.036	.078	.047	.025	.045	.028	.015	.015	.009	.005	
10.0	.125	.073	.038	.108	.063	.033	.075	.044	.023	.044	.026	.014	.014	.009	.005	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:03
 Test Date:2022-01-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.281
 Humidity:60.0%
 Test Distance:12.020m [K=1.0000]
 Remarks:

Uncorrected UGR Table

Test:U:240.2V I:0.4252A P:96.98W PF:0.9496 Lamp Flux:17742.1x1 lm										
NAME: P700 4KA - 96W					TYPE:			WEIGHT:		
SPEC.:					DIM.: 0.0870000			SERIAL No.:1		
MFR.: HALCYON					SUR.:			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	25.2	26.5	25.5	26.8	27.0	24.9	26.2	25.2	26.5	26.7
3H	25.4	26.6	25.7	26.8	27.1	25.1	26.2	25.4	26.5	26.8
4H	25.4	26.5	25.7	26.8	27.1	25.0	26.2	25.4	26.4	26.7
6H	25.3	26.4	25.7	26.7	27.0	25.0	26.0	25.3	26.3	26.6
8H	25.3	26.3	25.6	26.6	26.9	24.9	25.9	25.3	26.3	26.6
12H	25.3	26.2	25.6	26.5	26.9	24.9	25.9	25.3	26.2	26.5
4H 2H	25.2	26.4	25.6	26.6	26.9	25.0	26.1	25.3	26.4	26.6
3H	25.5	26.4	25.8	26.8	27.1	25.2	26.1	25.5	26.5	26.8
4H	25.5	26.4	25.9	26.7	27.1	25.2	26.1	25.6	26.4	26.8
6H	25.5	26.2	25.9	26.6	27.0	25.2	25.9	25.6	26.3	26.7
8H	25.4	26.2	25.9	26.5	27.0	25.1	25.8	25.6	26.2	26.6
12H	25.4	26.1	25.9	26.5	26.9	25.1	25.7	25.5	26.1	26.6
8H 4H	25.4	26.1	25.9	26.5	26.9	25.1	25.8	25.6	26.2	26.6
6H	25.4	26.0	25.9	26.4	26.9	25.1	25.7	25.6	26.1	26.6
8H	25.4	25.9	25.9	26.4	26.8	25.1	25.6	25.6	26.0	26.5
12H	25.4	25.8	25.9	26.3	26.8	25.1	25.5	25.6	26.0	26.5
12H 4H	25.4	26.0	25.8	26.4	26.9	25.1	25.7	25.5	26.1	26.6
6H	25.4	25.9	25.9	26.3	26.8	25.1	25.6	25.6	26.0	26.5
8H	25.4	25.8	25.9	26.3	26.8	25.1	25.5	25.6	26.0	26.5
Variations with the observer position at spacings:										
S = 1.0H	+ 1.1 / - 1.4					+ 1.2 / - 1.7				
1.5H	+ 0.6 / - 0.9					+ 0.7 / - 1.1				
2.0H	+ 2.4 / - 2.9					+ 2.6 / - 2.8				

CIE Pub.117 Corrected 17742 lm Total Lamp Luminous Flux. (8log(F/F0) = 10.0)

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:03
 Test Date:2022-01-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.281
 Humidity:60.0%
 Test Distance:12.020m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.2V I:0.4252A P:96.98W PF:0.9496 Lamp Flux:17742.1x1 lm		
NAME: P700 4KA - 96W	TYPE:	WEIGHT:
SPEC.:	DIM.: 0.0870000	SERIAL No.:1
MFR.: HALCYON	SUR.:	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	66	55	49	65	55	49	64	55	49	43
0.80	76	66	60	75	66	60	73	65	59	53
1.00	84	75	69	83	74	69	81	75	68	62
1.25	91	82	77	89	82	76	87	80	75	69
1.50	95	87	82	93	86	81	91	85	80	73
2.00	101	94	89	99	93	88	95	90	87	80
2.50	104	98	93	102	96	92	98	93	90	82
3.00	106	101	97	104	99	95	100	96	93	85
4.00	109	105	101	107	103	100	102	99	97	88
5.00	111	107	104	108	105	102	104	101	99	90
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:03
 Test Date:2022-01-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.281
 Humidity:60.0%
 Test Distance:12.020m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:240.2V I:0.4252A P:96.98W PF:0.9496 Lamp Flux:17742.1x1 lm		
NAME: P700 4KA - 96W	TYPE:	WEIGHT:
SPEC.:	DIM.: 0.0870000	SERIAL No.:1
MFR.: HALCYON	SUR.:	PROTECTION ANGLE:

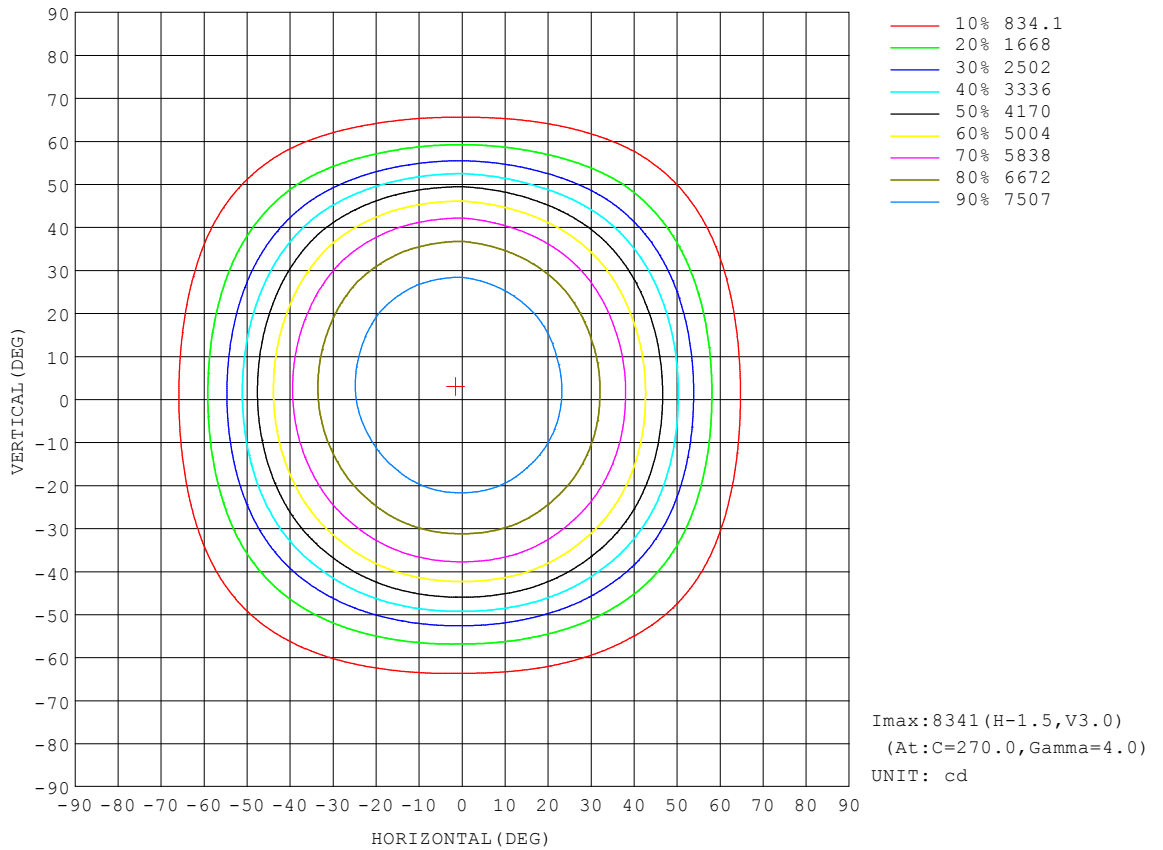


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 03
 Test Date: 2022-01-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.281
 Humidity: 60.0%
 Test Distance: 12.020m [K=1.0000]
 Remarks:

AAI Figure

Test:U:240.2V I:0.4252A P:96.98W PF:0.9496 Lamp Flux:17742.1x1 lm		
NAME: P700 4KA - 96W	TYPE:	WEIGHT:
SPEC.:	DIM.: 0.0870000	SERIAL No.:1
MFR.: HALCYON	SUR.:	PROTECTION ANGLE:

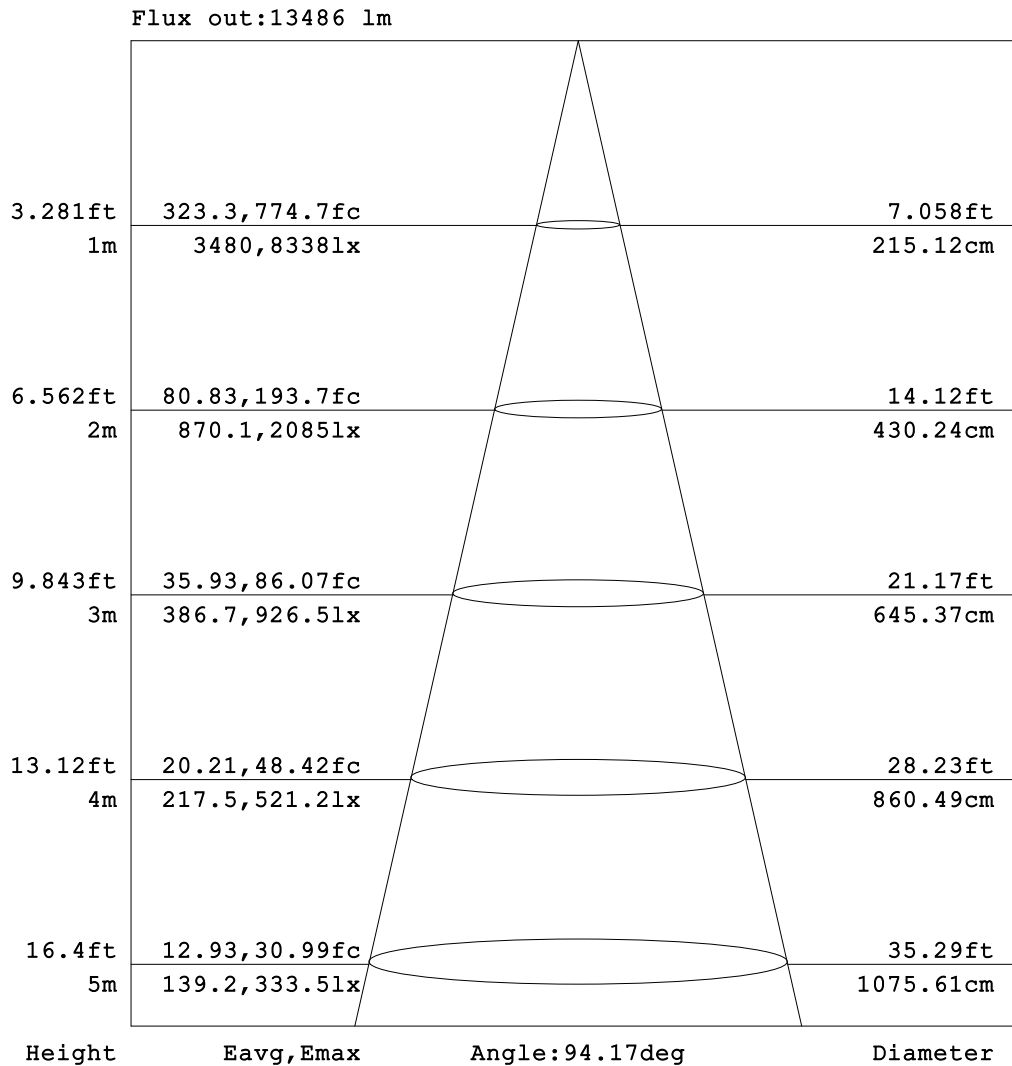


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:03
 Test Date:2022-01-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.281
 Humidity:60.0%
 Test Distance:12.020m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:240.2V I:0.4252A P:96.98W PF:0.9496 Lamp Flux:17742.1x1 lm		
NAME: P700 4KA - 96W	TYPE:	WEIGHT:
SPEC.:	DIM.: 0.0870000	SERIAL No.:1
MFR.: HALCYON	SUR.:	PROTECTION ANGLE:

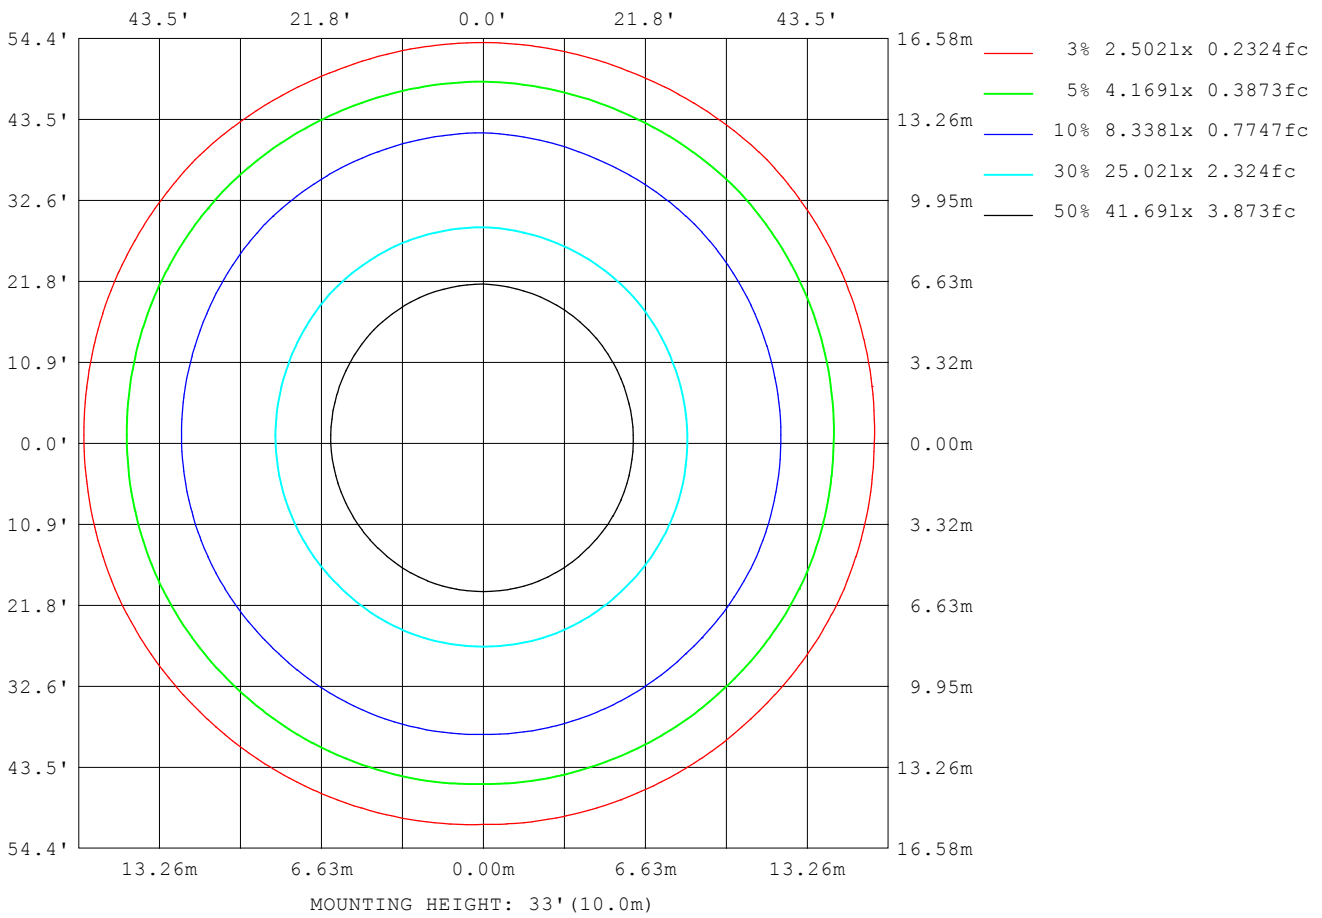

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:03
 Test Date:2022-01-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.281
 Humidity:60.0%
 Test Distance:12.020m [K=1.0000]
 Remarks:

Planar Illuminance Curve

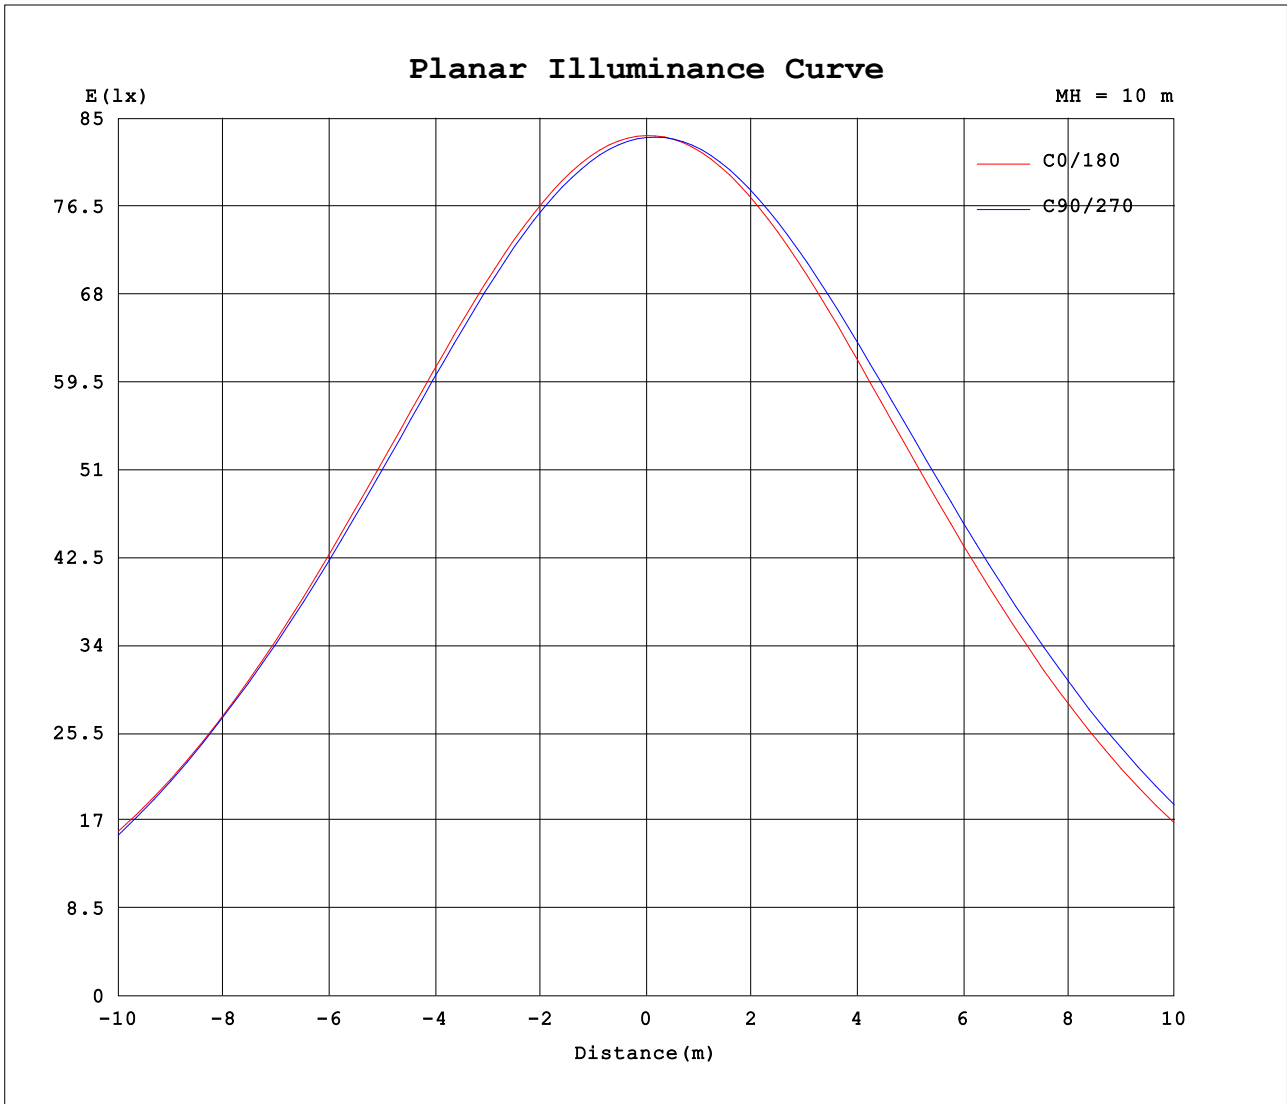

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 03
 Test Date: 2022-01-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.281
 Humidity: 60.0%
 Test Distance: 12.020m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:240.2V I:0.4252A P:96.98W PF:0.9496 Lamp Flux:17742.1x1 lm		
NAME: P700 4KA - 96W	TYPE:	WEIGHT:
SPEC.:	DIM.: 0.0870000	SERIAL No.:1
MFR.: HALCYON	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	23	45	68	90	113	135	158	180	203	225	248	270	293	315	338			
0	8323	8323	8323	8323	8323	8323	8323	8323	8323	8323	8323	8323	8323	8323	8323	8323			
5	8277	8262	8251	8249	8247	8257	8267	8285	8306	8319	8333	8339	8341	8331	8318	8297			
10	8159	8132	8112	8110	8109	8125	8141	8176	8216	8252	8284	8293	8297	8272	8241	8198			
15	7969	7933	7906	7908	7903	7921	7943	7994	8052	8106	8165	8189	8187	8144	8093	8025			
20	7702	7655	7619	7623	7619	7642	7661	7723	7805	7884	7971	8008	8007	7944	7867	7774			
25	7350	7303	7261	7267	7258	7280	7297	7367	7465	7571	7688	7746	7744	7654	7560	7442			
30	6890	6837	6798	6816	6804	6827	6837	6920	7031	7151	7300	7373	7377	7262	7144	6996			
35	6276	6235	6201	6242	6230	6255	6249	6341	6467	6607	6784	6875	6880	6742	6596	6404			
40	5490	5450	5410	5475	5471	5482	5459	5574	5722	5886	6092	6193	6195	6028	5842	5622			
45	4514	4466	4384	4432	4417	4445	4434	4574	4749	4924	5169	5253	5254	5038	4857	4638			
50	3394	3327	3183	3169	3148	3213	3248	3428	3590	3739	3959	4007	4020	3799	3689	3526			
55	2246	2190	2062	1996	1982	2069	2172	2324	2430	2537	2626	2619	2624	2513	2501	2386			
60	1369	1342	1267	1248	1229	1297	1378	1478	1529	1587	1615	1535	1531	1520	1551	1470			
65	807	787	740	741	720	769	818	876	913	947	954	909	887	901	910	861			
70	468	447	425	422	410	437	462	491	525	536	542	513	494	516	524	491			
75	238	221	207	209	203	217	239	255	274	285	287	276	269	277	269	252			
80	102	96.6	91.7	92.4	91.3	96.6	103	113	121	127	129	122	121	120	119	110			
85	41.0	37.2	33.4	33.6	33.1	36.2	40.7	48.5	53.4	54.5	53.9	49.4	50.4	48.4	47.7	43.9			
90	5.95	6.08	6.21	6.05	6.11	6.04	6.15	6.06	5.72	6.06	6.60	5.93	6.03	5.24	5.14	5.35			
95	9.09	9.28	9.63	9.48	9.55	9.26	9.29	8.85	7.84	7.62	7.23	7.19	7.09	7.41	7.63	8.13			
100	13.5	14.0	14.4	14.5	14.4	14.1	13.9	13.4	11.9	11.6	11.1	11.0	10.9	11.2	11.5	12.2			
105	19.4	20.1	20.8	20.8	20.9	20.3	19.9	19.2	17.3	16.7	16.2	16.1	16.0	16.4	16.8	17.5			
110	26.6	27.3	28.3	28.4	28.5	27.7	27.2	26.2	23.9	23.3	22.6	22.5	22.4	22.9	23.3	24.3			
115	34.8	35.6	36.8	37.0	37.1	36.2	35.5	34.2	31.5	30.8	30.0	30.0	29.9	30.5	30.9	32.1			
120	43.6	44.6	45.9	46.2	46.3	45.3	44.5	43.0	39.9	39.2	38.4	38.4	38.3	38.9	39.4	40.7			
125	53.0	54.2	55.4	55.8	55.8	54.8	53.9	52.5	48.9	48.1	47.2	47.2	47.1	47.8	48.3	49.6			
130	62.7	63.9	65.1	65.5	65.6	64.5	63.6	62.1	57.9	57.0	56.3	56.3	56.2	56.8	57.3	58.8			
135	72.1	73.0	74.3	74.6	74.8	73.8	73.0	71.4	67.0	66.1	65.3	65.2	65.1	65.8	66.4	67.9			
140	80.6	81.5	82.6	83.0	83.3	82.5	81.6	80.2	76.1	75.2	74.2	74.3	74.1	74.9	75.4	77.0			
145	88.8	89.6	90.6	91.0	91.6	90.8	90.0	88.7	84.6	83.5	82.7	82.5	82.6	83.0	83.8	85.3			
150	97.0	97.9	99.0	99.4	100.0	99.4	98.7	97.4	93.1	92.1	91.2	91.0	90.9	91.4	92.2	93.6			
155	105	106	107	108	109	108	107	106	102	101	100	99.8	99.8	100	101	102			
160	114	114	115	116	117	116	115	115	110	109	109	109	109	109	110	111			
165	121	121	122	123	124	123	123	122	118	118	117	117	117	118	118	119			
170	126	127	128	128	128	128	128	128	125	125	124	124	124	124	125	125			
175	129	129	130	130	130	130	131	131	128	128	128	128	128	128	129	129			
180	130	130	130	130	130	130	131	131	130	130	130	130	130	130	131	131			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:03
 Test Date:2022-01-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.281
 Humidity:60.0%
 Test Distance:12.020m [K=1.0000]
 Remarks: